



Oliver Stedman Government Center
4808 Tower Hill Road; Suite 116
Wakefield, RI 02879
401-783-3370

PUBLIC NOTICE

File Number: 2015-10-085

Date: December 3, 2015

This office has under consideration the application of:

Christopher Hubbard
60 Sheridan Road
Wellesley, MA

for a State of Rhode Island Assent to construct and maintain: A Residential Boating Facility consisting of a 4'x71' fixed pier to a 3'x 20' ramp to a 10'x15' float, extending 50 feet beyond Mean Low Water (MLW).


Project Location:	76 Maple Street
City/Town:	Warren
Plat/Lot:	15C / 1
Waterway:	Warren River

Plans of the proposed work may be seen at the CRMC office in Wakefield.

In accordance with the Administrative Procedures Act (Chapter 42-35 of the Rhode Island General Laws) you may request a hearing on this matter.

You are advised that if you have good reason to enter protests against the proposed work it is your privilege to do so. It is expected that objectors will review the application and plans thoroughly, visit site of proposed work if necessary, to familiarize themselves with the conditions and cite what law or laws, if any, would in their opinion be violated by the work proposed.

If you desire to protest, you must attend the scheduled hearing and give sworn testimony. A notice of the time and place of such hearing will be furnished you as soon as possible after receipt of your request for hearing. If you desire to request a hearing, to receive consideration, it should be in writing (**with your correct mailing address, e-mail address and valid contact number**) and be received at this office on or before January 3, 2016.

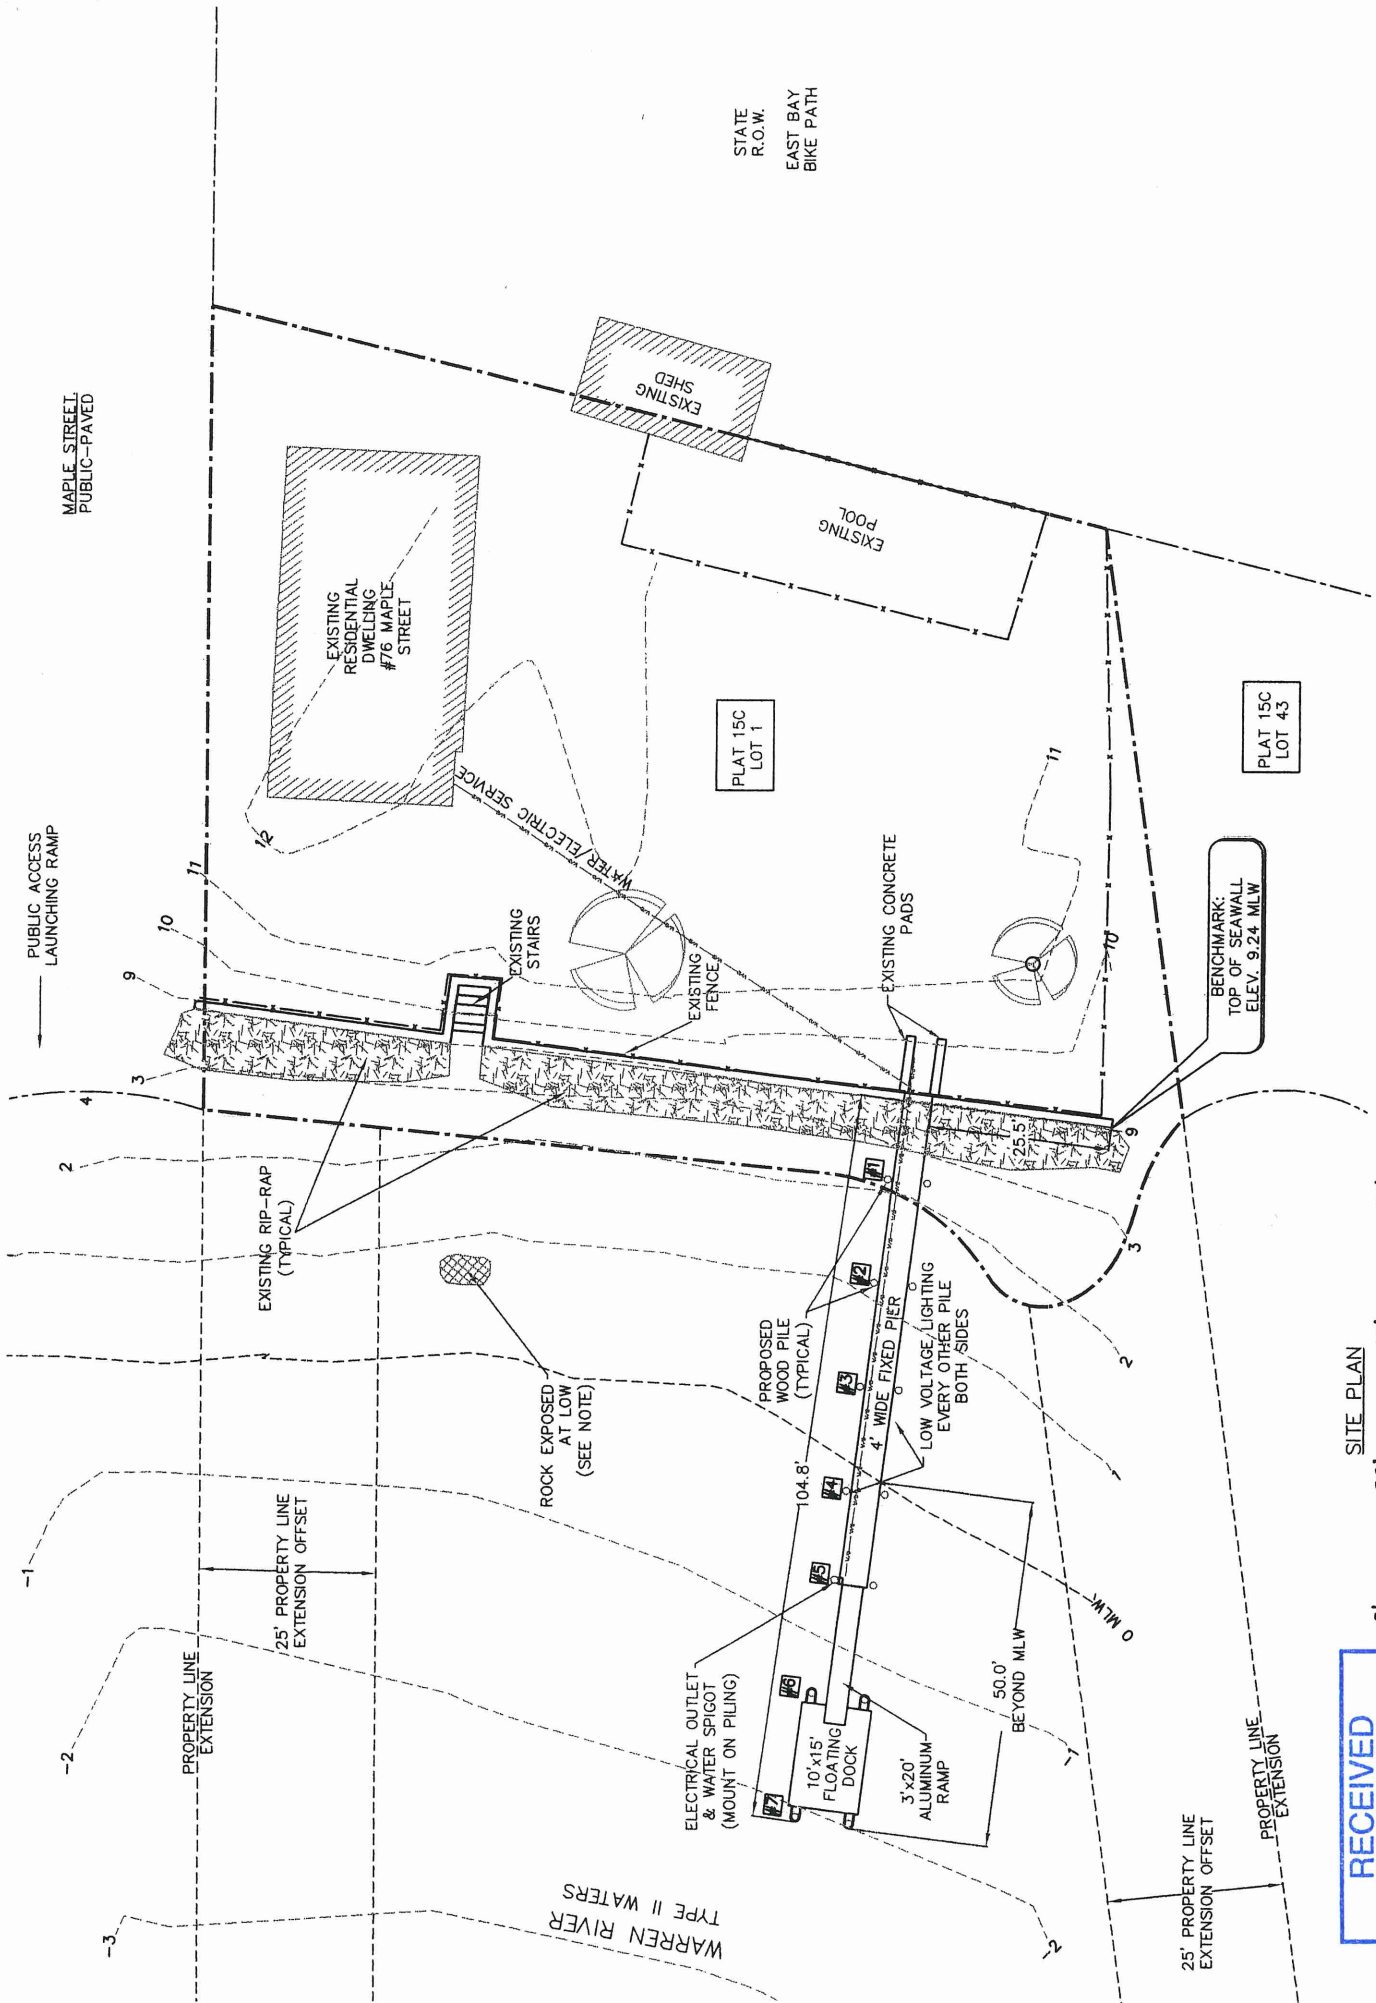


- LEGEND**
- PROPERTY LINE
 - RIPARIAN LINE
 - RIPARIAN LINE OFFSET
 - 5' EXISTING CONTOUR
 - X EXISTING FENCE



RECEIVED
OCT 22 2015
 COASTAL RESOURCES
 MANAGEMENT COUNCIL

ALLED AS

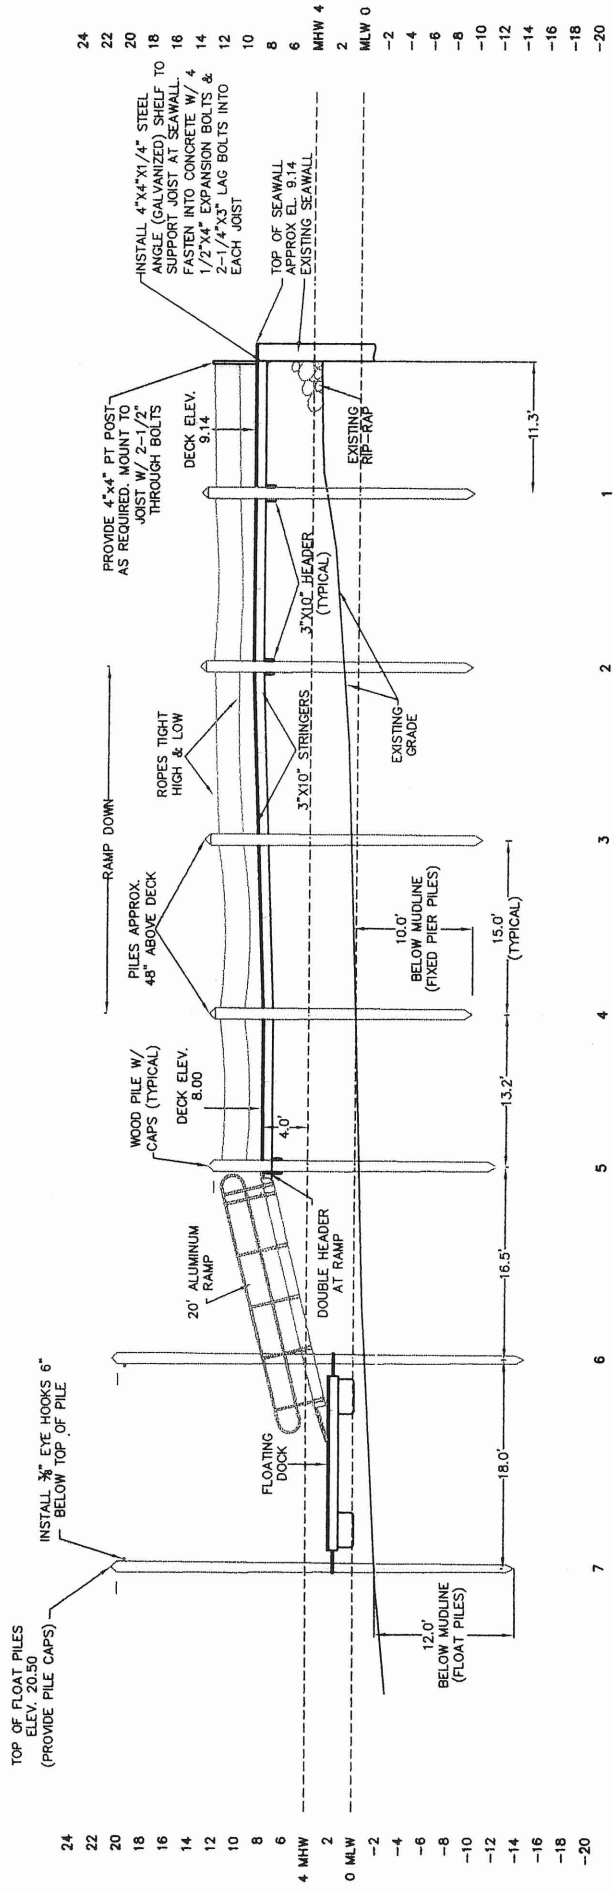

ALL FIXED PIER PILES SHALL BE
DRIVEN 10' BELOW MUDLINE.
ALL FLOAT PILES SHALL BE DRIVEN
12' BELOW MUDLINE.

DOCK PROFILE



FLOOD ZONE IS VE (EL 16) MSL
HEIGHT OF FLOAT PILES=18+2'(MLW TO MSL)+1.5'(FREEBOARD)+1'=20.50

