

State of Rhode Island Coastal Resources Management Council Oliver H. Stedman Government Center 4808 Tower Hill Road, Suite 3 Wakefield, RI 02879-1900

(401) 783-3370 Fax (401) 783-2069

## PUBLIC NOTICE

File Number: 2022-09-003

Date: September 22, 2022

This office has under consideration the application of:

## Timothy Deschenes & Alyssa Merkle 90 King Phillip Avenue Bristol, RI 02809

for a State of Rhode Island Assent to construct and maintain: A residential boating facility consisting of a 4' x 97' fixed timber pier/stairs leading to a 3' x 20' access ramp and 10' x 15' (150sf) terminal float. The facility is proposed to extend 69' seaward of the cited MLW mark, for a total distance of 131', requiring a 19' length variance to Redbook 650-RICR-20-00-01 Section 1.3.1(D)(11)(l). The facility also requires a 15' property line setback variance to both the north and south, per Section 1.3.1(D)(11)(k).

Project Location:	90 King Philip Avenue
City/Town:	Bristol
Plat/Lot:	147 / 63
Waterway:	Mt. Hope Bay, Type II, Low Intensity Use

Plans of the proposed work can be requested at <u>Cstaff1@crmc.ri.gov</u>.

In accordance with the Administrative Procedures Act (Chapter 42-35 of the Rhode Island General Laws) you may request a hearing on this matter.

You are advised that if you have good reason to enter protests against the proposed work it is your privilege to do so. It is expected that objectors will review the application and plans thoroughly, visit site of proposed work if necessary, to familiarize themselves with the conditions and cite what law or laws, if any, would in their opinion be violated by the work proposed.

If you desire to protest, you must attend the scheduled hearing and give sworn testimony. A notice of the time and place of such hearing will be furnished you as soon as possible after receipt of your request for hearing. If you desire to request a hearing, to receive consideration, it should be in writing (with your correct mailing address, e-mail address and valid contact number) and be received at this office on or before <u>October 22, 2022</u>.


Please email your comments/hearing requests to: <u>cstaff1@crmc.ri.gov</u>; or mail via USPS to: Coastal Resources Management Council; O. S. Government Center, 4808 Tower Hill Road, Rm 116; Wakefield, RI 02879. CRMC Mailing List for Timothy Deschenes & Alyssa Merkle CRMC File Number 2022-09-003

Timothy Deschenes & Alyssa Merkle 90 King Phillip Avenue Bristol, RI 02809


Harold & Rebecca Garner 1193 Sunrise Ridge Dr Lafayette, CA 94549

Roger Darling 88 king Philip Ave Bristol, RI 02809

CRMC (2022-09-003) O. S. Government Center 4808 Tower Hill Road Wakefield, RI 02879

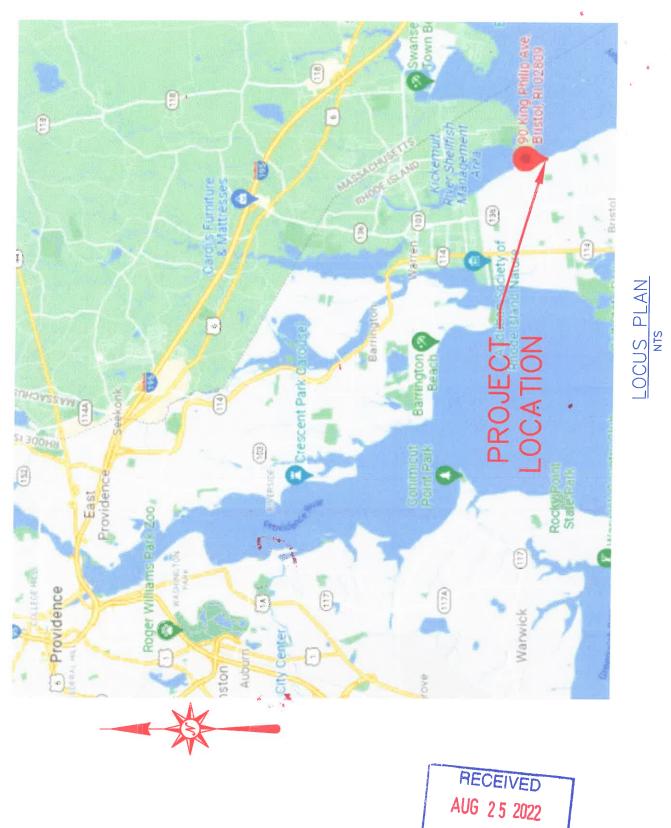

COASTAL RESOURCES MANAGEMENT COUNCIL 4

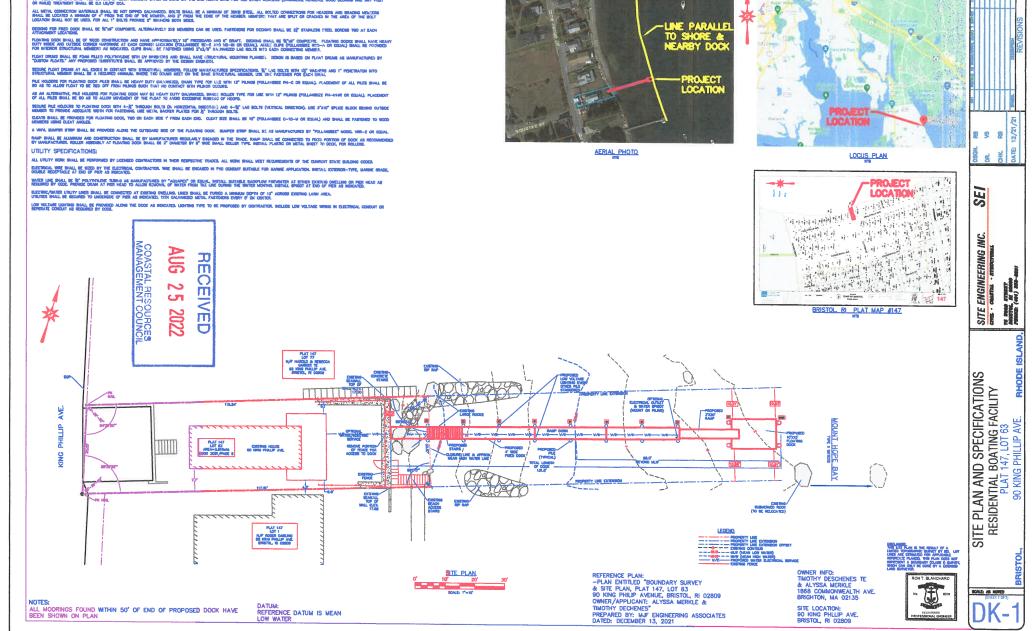


ALL OTHER STRUCTURAL MEMBERS CHALL GE BOUTHERN OUT SELOW THE MANY LINE. ALL CUTTING OF SUCH MEM OR RMLS) THEATMENT SHALL BE D.S LEVER COA. 


AL 1000 FLINGS SHALL BE 12" DAMETER SOUTHERN PAR WITH A LINNERN THE DAMETER OF S". MINISAN FLE DAMETER AT MADARE SHALL BE 10". PRESUME TRAATADIT SHALL BE 25 JAJOF CA. FLES SHALL BE CINEN TO DEPTHE AS NORARED ON THE FLAN FLES MAY BE DEPEN USING A VIEWATORY MANNER AS LENS AS THE MINISAN FLE PORTIGITION OF THE ATTAND.

IN THE EVENT THAT ANY PLE PENETRATION CANNOT BE ATTAINED THE CONTRACTOR SHALL CONTACT THE DESIGN DIGINEEL. FOR ANY LOCATION WHERE PLE DEPTH CAN NOT BE ACKEVED THE CONTRACTOR SHALL RECORD THOSE LOCATIONS AND BUBINT RECORDS TO THE DESIGN DIGINEER.


GENERAL SPECIFICATIONS

- Damiderare

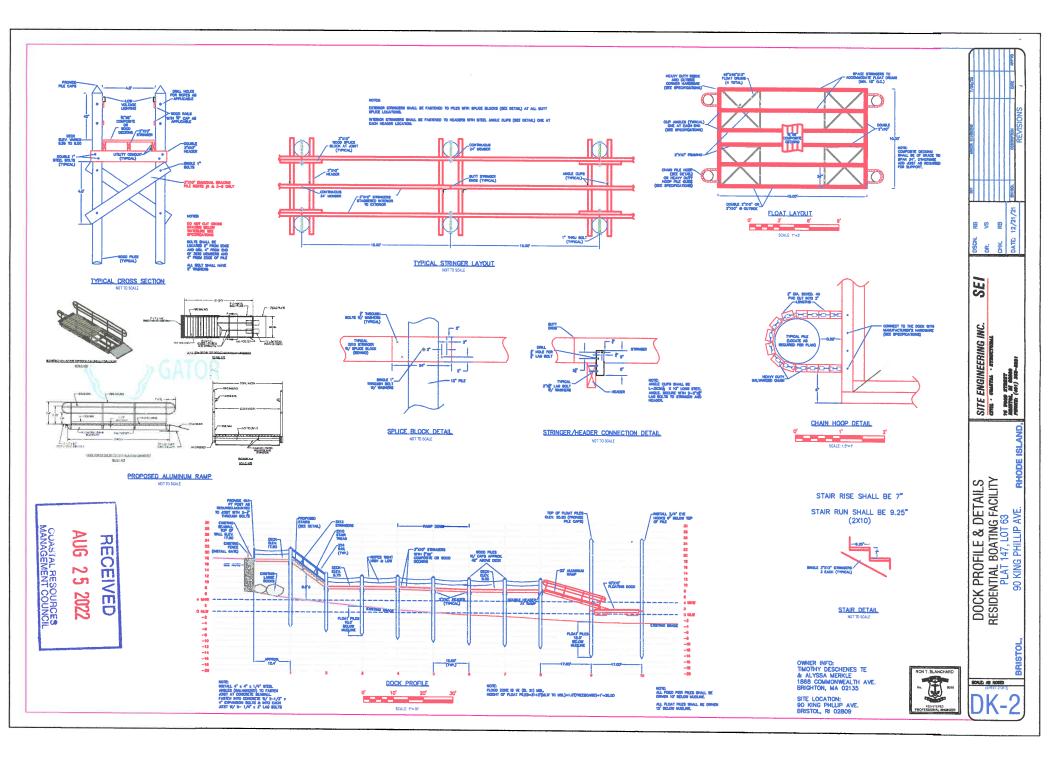

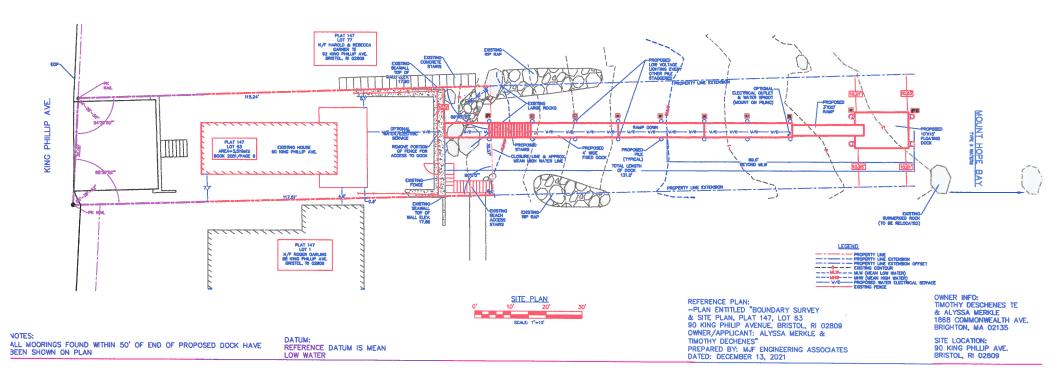



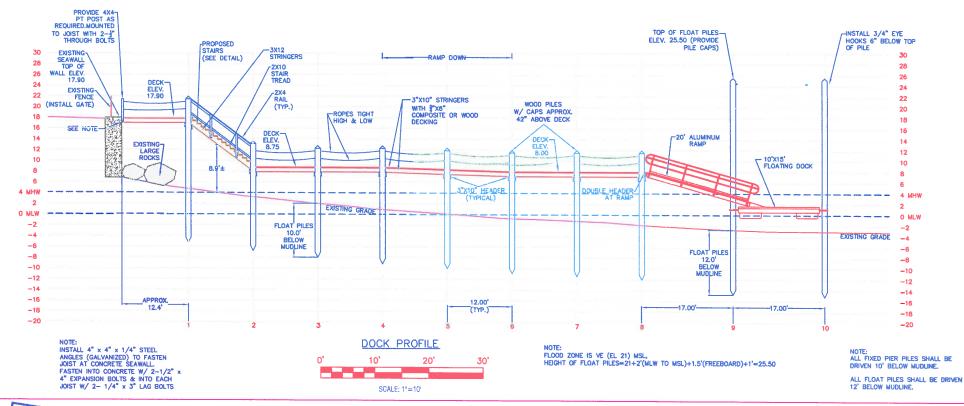

RECEIVED AUG 2.5 2022 MANAGEMENT COUNCEL

## GENERAL SPECIFICATIONS:

IN THE EVENT THAT ANY PILE PENETRATION CANNOT BE ATTAINED THE CONTRACTOR SHALL CONTACT THE DESIGN ENGINEER. FOR ANY LOCATION WHERE PILE DEPTH CAN NOT BE ACHIEVED THE CONTRACTOR SHALL RECORD THOSE LOCATIONS AND SUBMIT RECORDS TO THE DESIGN ENGINEER.

ALL WOOD PILINGS SHALL BE 12" DIAMETER SOUTHERN PINE WITH A MINIMUM TIP DIAMETER OF 8". MINIMUM PILE DIAMETER AT MUDLINE SHALL BE 10". PRESSURE TREATMENT SHALL BE 2.5 LB/CF CCA. PILES SHALL BE DRIVEN TO DEPTHS AS INDICATED ON THE PLAN. PILES MAY BE DRIVEN USING A VIBRATORY HAMMER AS LONG AS THE MINIMUM PILE PENETRATION CAN BE ATTAINED.

ALL OTHER STRUCTURAL MEMBERS SHALL BE SOUTHERN PINE OR EQUIVALENT. MINIMUM TREATMENT FOR CROSS BRACING SHALL BE 2.5 LB/CF OF CCA. DIAGONAL BRACING SHALL NOT BE CUT BELOW THE MHW LINE. ALL CUTTING OF SUCH MEMBERS SHALL BE DONE ON THE END ABOVE MHW. FOR ALL OTHER MEMBERS (STRINGERS, HEADERS, WOOD DECKING AND ANY POST OR RAILS) TREATMENT SHALL BE 0.6 LB/CF CCA.

ALL METAL CONNECTION MATERIALS SHALL BE HOT DIPPED GALVANIZED. BOLTS SHALL BE A MINIMUM OF 36KSI STEEL. ALL BOLTED CONNECTIONS FOR HEADERS AND BRACING MEMBERS SHALL BE LOCATED A MINIMUM OF 4" FROM THE END OF THE MEMBER, AND 2" FROM THE EDGE OF THE MEMBER. MEMBERS THAT ARE SPLIT OR CRACKED IN THE AREA OF THE BOLT LOCATION SHALL NOT BE USED. FOR ALL 1" BOLTS PROVIDE 2" WASHERS BOTH SIDES.

DECKING FOR FIXED DOCK SHALL BE 5/4"x6" COMPOSITE. ALTERNATIVELY 2X6 MEMBERS CAN BE USED. FASTENERS FOR DECKING SHALL BE 2/2" STAINLESS STEEL SCREWS TWO AT EACH ATTACHMENT LOCATIONS.

FLOATING DOCK SHALL BE OF WOOD CONSTRUCTION AND HAVE APPROXIMATELY 18" FREEBOARD AND 6" DRAFT. DECKING SHALL BE 54"x6" COMPOSITE. FLOATING DOCKS SHALL HAVE HEAVY DUTY INSIDE AND OUTSIDE CORNER HARDWARE AT EACH CORNER LOCATION (FOLLANSBEE WD-E AND WD-IN OR EQUAL). ANGLE CLIPS (FOLLANSBEE RWD-A OR EQUAL) SHALL BE PROVIDED FOR INTERIOR STRUCTURAL MEMBERS AS INDICATED. CLIPS SHALL BE FASTENED USING 2"x3/8" GALVANIZED LAG BOLTS INTO EACH CONNECTING MEMBER. FLOAT DRUMS SHALL BE FOAM FILLED POLYTHYLENE WITH UV INHIBITORS AND SHALL HAVE STRUCTURAL MOUNTING FLANGES. DESIGN IS BASED ON FLOAT DRUMS AS MANUFACTURED BY "CUSTOM FLOATS." ANY PROPOSED SUBSTITUTES SHALL BE APPROVED BY THE DESIGN ENGINEER.

SECURE FLOAT DRUMS AT ALL EDGES IN CONTACT WITH STRUCTURAL MEMBERS. FOLLOW MANUFACTURES SPECIFICATIONS. 3/8" LAG BOLTS WITH 11/2" WASHERS AND 1" PENETRATON INTO STRUCTURAL MEMBER SHALL BE A REQUIRED MINIMUM. WHERE TWO DRUMS MEET ON THE SAME STRUCTURAL MEMBER, USE ONE FASTENER FOR EACH DRUM.

PILE HOLDERS FOR FLOATING DOCK PILES SHALL BE HEAVY DUTY GALVANIZED, CHAIN TYPE FOR USE WITH 12" PILINGS (FOLLANSBEE PH-C OR EQUAL). PLACEMENT OF ALL PILES SHALL BE SO AS TO ALLOW FLOAT TO BE TIED OFF FROM PILINGS SUCH THAT NO CONTACT WITH PILINGS OCCURS. AS AN ALTERNATIVE, PILE HOLDERS FOR FLOATING DOCK MAY BE HEAVY DUTY GALVANIZED, SINGLE ROLLER TYPE FOR USE WITH 12" PILINGS (FOLLANSBEE PH-H14R OR EQUAL). PLACEMENT

OF ALL PILES SHALL BE SO AS TO ALLOW MOVEMENT OF THE FLOAT TO AVOID EXCESSIVE RUBBING OF HOOPS. SECURE PILE HOLDERS TO FLOATING DOCK WITH  $4-\frac{1}{2}$ " THROUGH BOLTS (IN HORIZONTAL DIRECTION) AND  $4-\frac{3}{4}$ " LAG BOLTS (VERTICAL DIRECTION). USE 3"X10" SPLICE BLOCK BEHIND OUTSIDE


MEMBER TO PROVIDE ADEQUATE WIDTH FOR FASTENING. USE METAL BACKER PLATES FOR  $\frac{1}{2}$ " THROUGH BOLTS. CLEATS SHALL BE PROVIDED FOR FLOATING DOCK, TWO ON EACH SIDE 1' FROM EACH END. CLEAT SIZE SHALL BE 10" (FOLLANSBEE C-10-M OR EQUAL) AND SHALL BE FASTENED TO WOOD MEMBERS USING CLEAT ANGLES.


A VINYL BUMPER STRIP SHALL BE PROVIDED ALONG THE OUTBOARD SIDE OF THE FLOATING DOCK. BUMPER STRIP SHALL BE AS MANUFACTURED BY "FOLLANSBEE" MODEL VRR-2 OR EQUAL. RAMP SHALL BE ALUMINUM AND CONSTRUCTION SHALL BE BY MANUFACTURER REGULARLY ENGAGED IN THE TRADE. RAMP SHALL BE CONNECTED TO FIXED PORTION OF DOCK AS RECOMMENDED BY MANUFACTURER. ROLLER ASSEMBLY AT FLOATING DOCK SHALL BE 2" DIAMETER BY 6" WIDE SMALL ROLLER TYPE. INSTALL PLASTIC OR METAL SHEET TO DECK, FOR ROLLERS. UTILITY SPECIFICATIONS:

ALL UTILITY WORK SHALL BE PERFORMED BY LICENSED CONTRACTORS IN THEIR RESPECTIVE TRADES. ALL WORK SHALL MEET REQUIREMENTS OF THE CURRENT STATE BUILDING CODES. ELECTRICAL WIRE SHALL BE SIZED BY THE ELECTRICAL CONTRACTOR. WIRE SHALL BE ENCASED IN PVC CONDUIT SUITABLE FOR MARINE APPLICATION. INSTALL EXTERIOR-TYPE, MARINE GRADE, DOUBLE RECEPTACLE AT END OF PIER AS INDICATED.

WATER LINE SHALL BE <sup>3</sup>/<sub>4</sub>" POLYTHYLENE TUBING AS MANUFACTURED BY "AQUAPEX" OR EQUAL. INSTALL SUITABLE BACKFLOW PREVENTER AT EITHER EXISTING DWELLING OR PIER HEAD AS REQUIRED BY CODE. PROVIDE DRAIN AT PIER HEAD TO ALLOW REMOVAL OF WATER FROM THE LINE DURING THE WINTER MONTHS. INSTALL SPIGOT AT END OF PIER AS INDICATED. ELECTRIC/WATER UTILITY LINES SHALL BE CONNECTED AT EXISTING DWELLING. LINES SHALL BE BURIED A MINIMUM DEPTH OF 12" ACROSS EXISTING LAWN AREA. UTILITIES SHALL BE SECURED TO UNDERSIDE OF PIER AS INDICATED, WITH GALVANIZED METAL FASTENERS EVERY 5' ON CENTER.

LOW VOLTAGE LIGHTING SHALL BE PROVIDED ALONG THE DOCK AS INDICATED. LIGHTING TYPE TO BE PROPOSED BY CONTRACTOR. INCLUDE LOW VOLTAGE WIRING IN ELECTRICAL CONDUIT OR SEPERATE CONDUIT AS REQUIRED BY CODE.

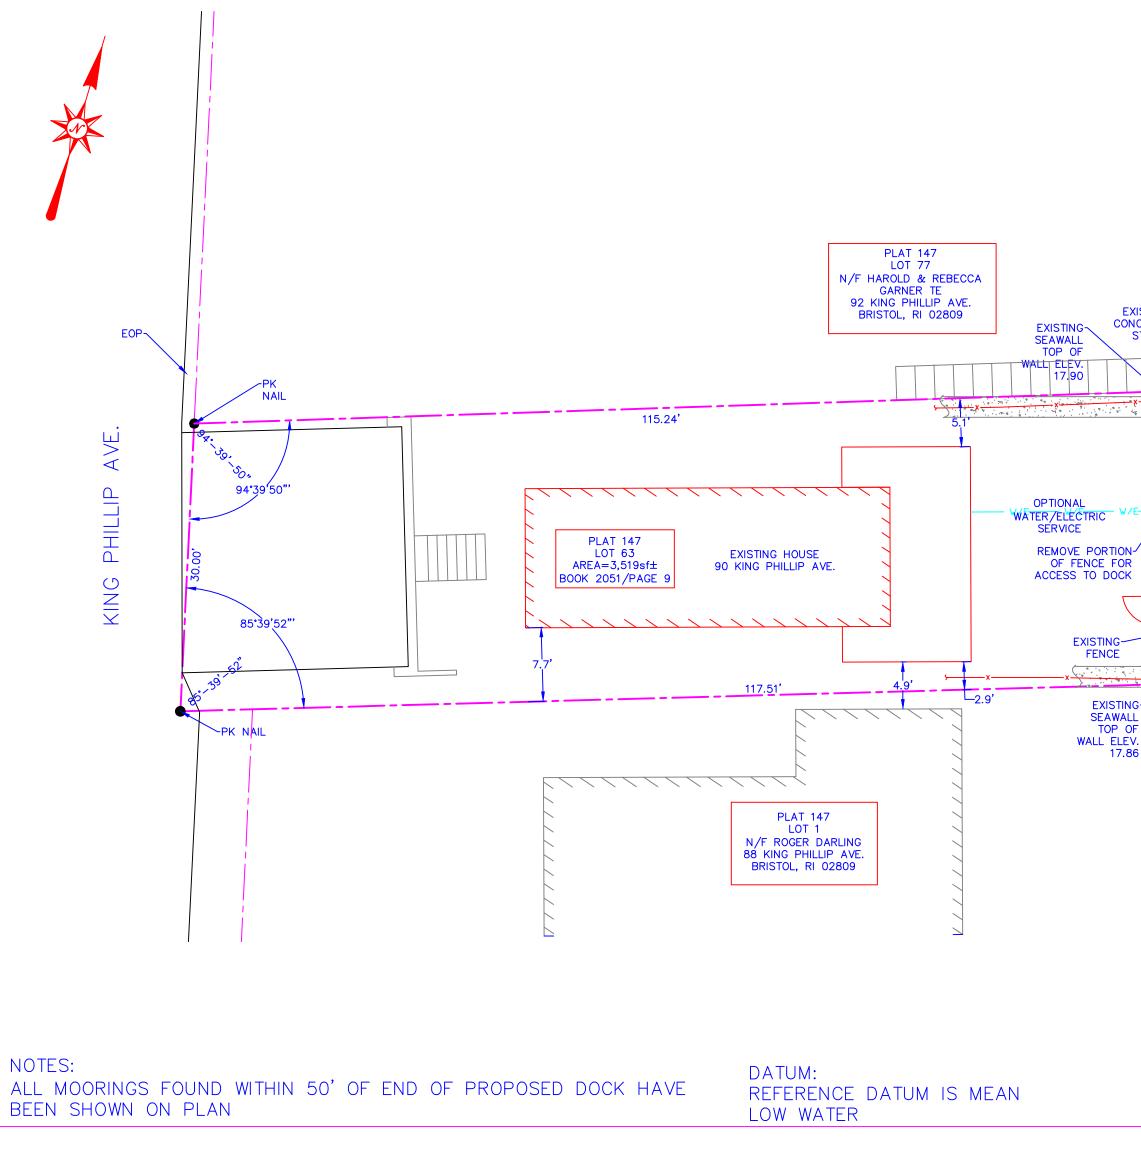

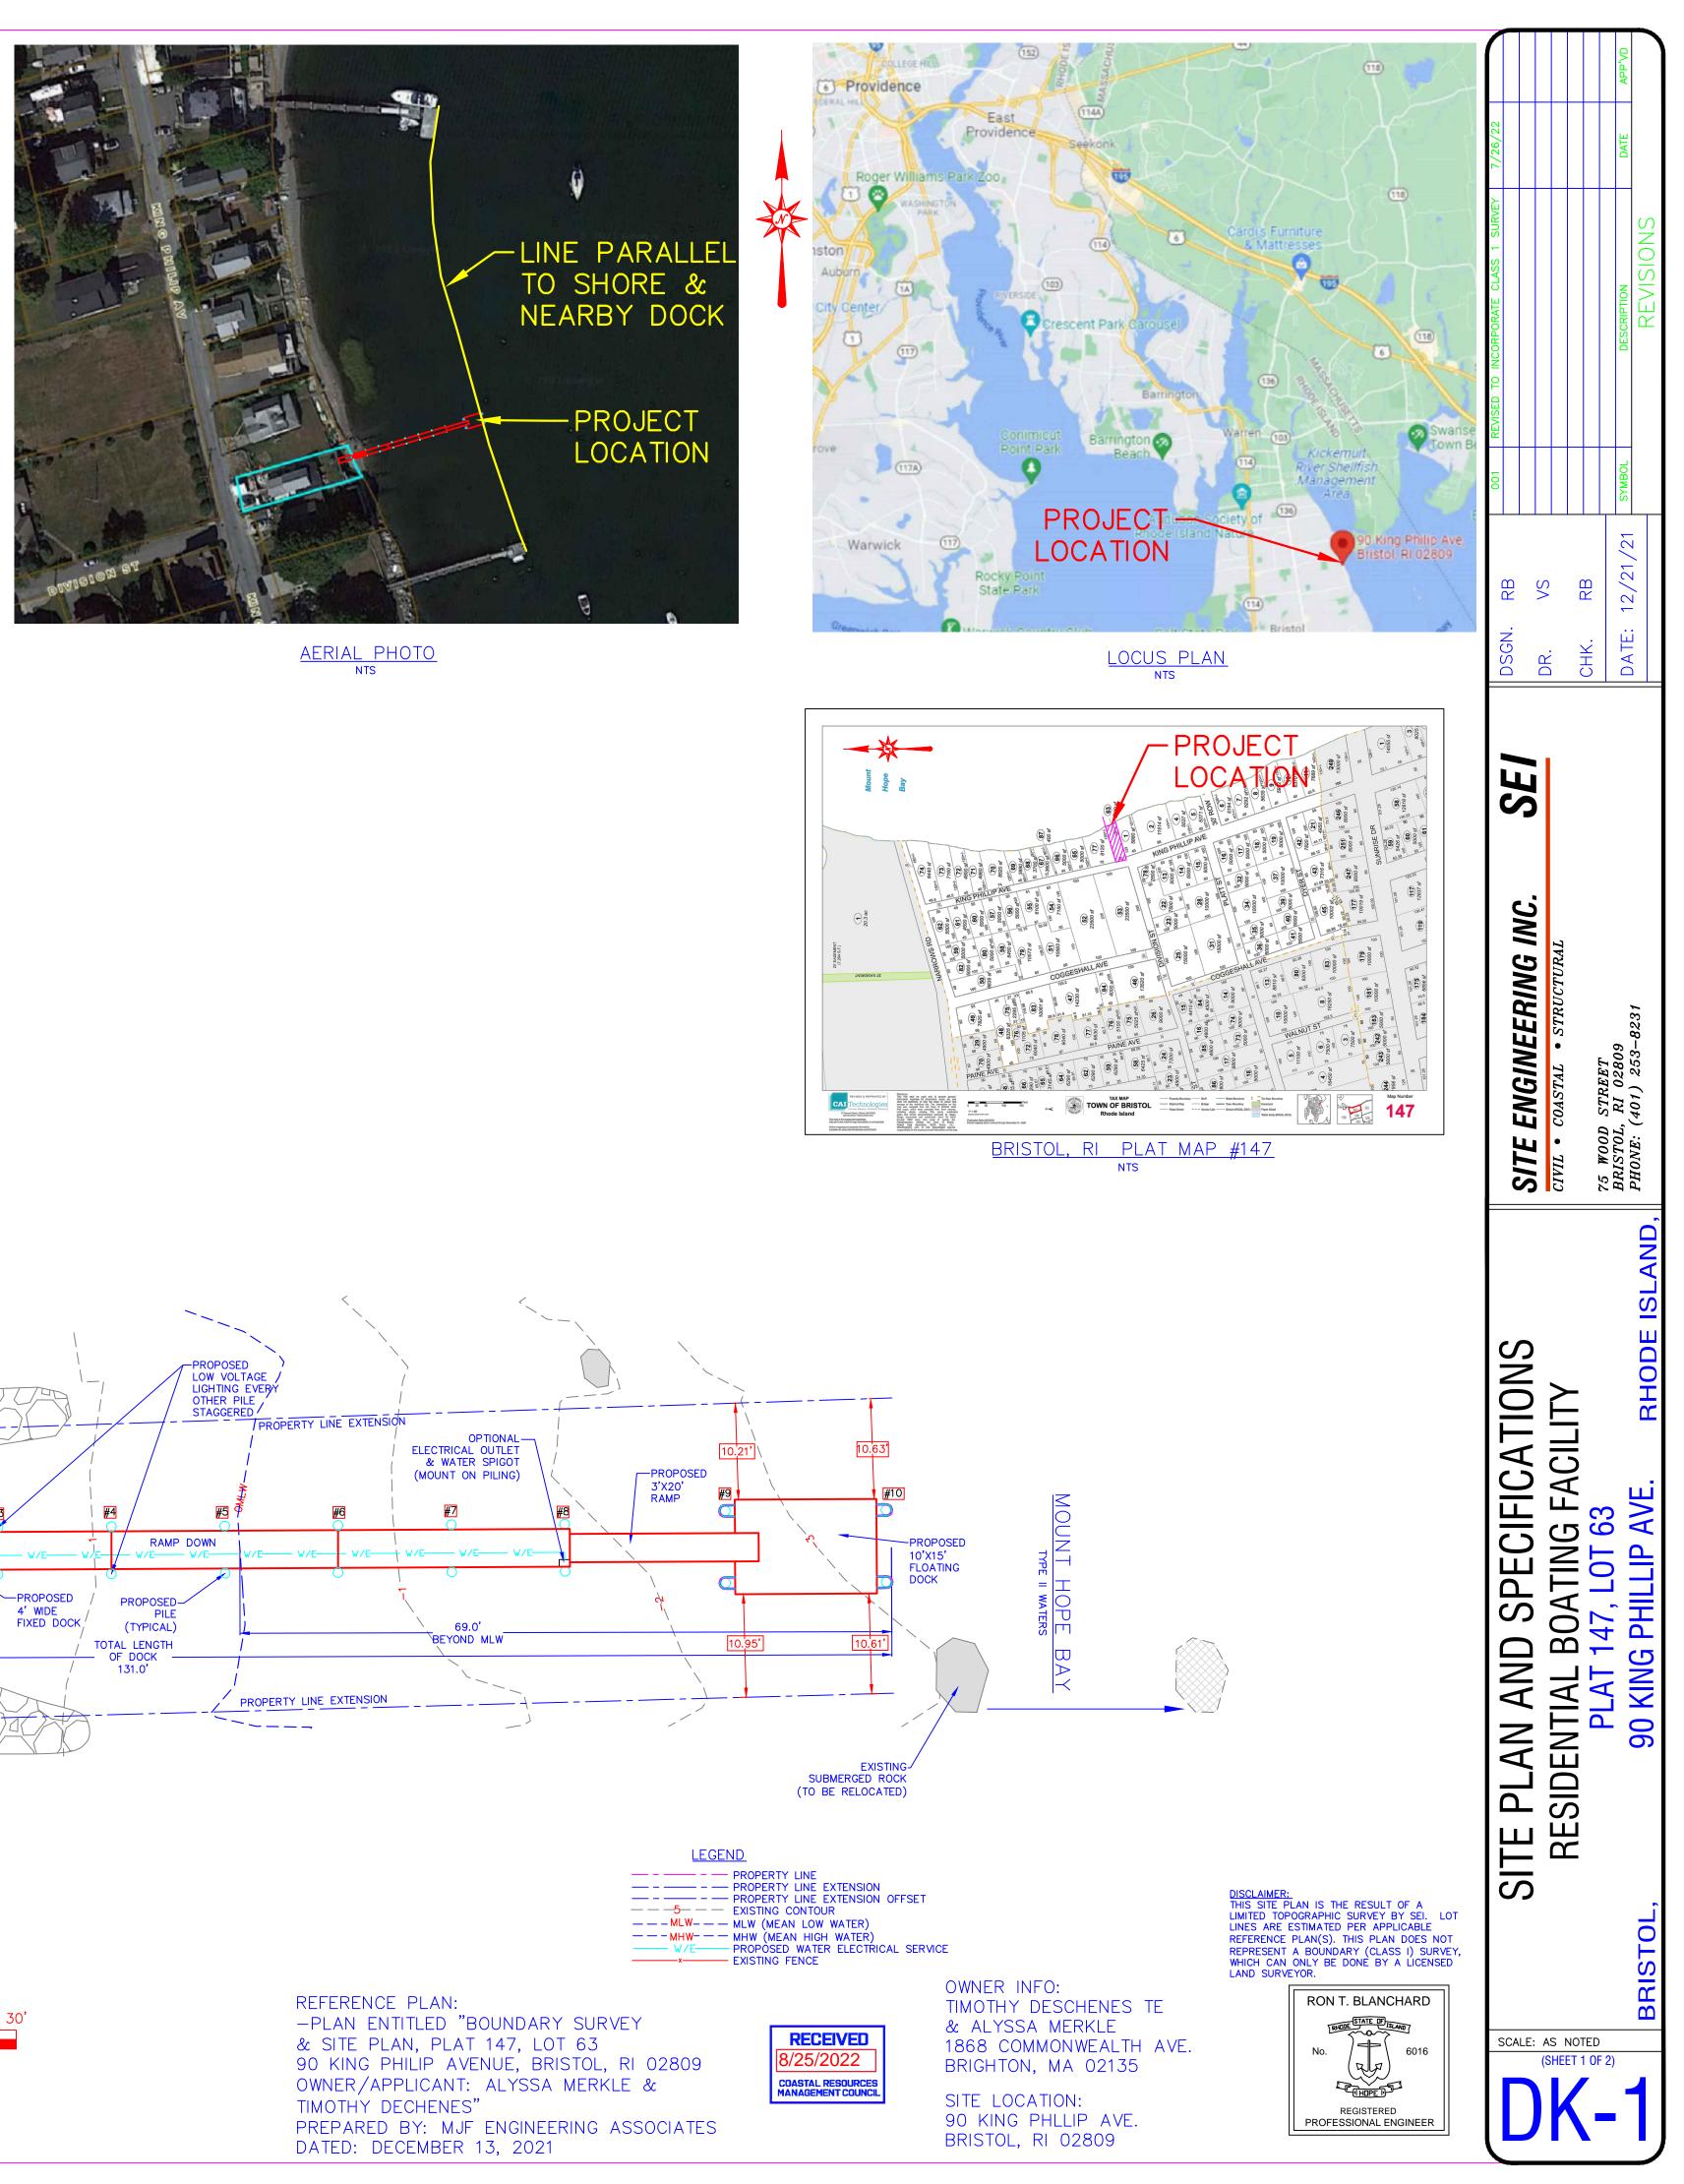

EXISTING~ RIP RAP EXISTIN CONCRETE ARGE ROCKS LPROPOSED STAIRS / CLOSURE/LINE & APPROX. MEAN HIGH WATER LINE FENCE EXISTING SEAWALL TOP OF EXISTING BEACH ACCESS STAIRS **EXISTIN** RIP RAP WALL ELEV. 17.86

SCALE: 1"=10'

