



State of Rhode Island
Coastal Resources Management Council
 Oliver H. Stedman Government Center
 4808 Tower Hill Road, Suite 3
 Wakefield, RI 02879-1900

(401) 783-3370
 Fax (401) 783-2069

PUBLIC NOTICE

File Number: 2021-07-081 Date: September 8, 2021

This office has under consideration the application of:

Michael & Leigh Cappello
21 Hampden Street
Barrington, RI 02806

for a State of Rhode Island Assent to construct and maintain:

A residential boating facility consisting of a 4' x 6' upland ramp, 4' x 75' fixed timber pier, 3' x 20' ramp and 10' x 15' (150sf) terminal float. The facility is proposed to extend ~43' seaward of the cited MLW mark.

Project Location:	21 Hampden Street
City/Town:	Barrington
Plat/Lot:	27 / 1
Waterway:	Palmer River, Type II


Plans of the proposed work may be seen at the CRMC office in Wakefield.

In accordance with the Administrative Procedures Act (Chapter 42-35 of the Rhode Island General Laws) you may request a hearing on this matter.

You are advised that if you have good reason to enter protests against the proposed work it is your privilege to do so. It is expected that objectors will review the application and plans thoroughly, visit site of proposed work if necessary, to familiarize themselves with the conditions and cite what law or laws, if any, would in their opinion be violated by the work proposed.


If you desire to protest, you must attend the scheduled hearing and give sworn testimony. A notice of the time and place of such hearing will be furnished you as soon as possible after receipt of your request for hearing. If you desire to request a hearing, to receive consideration, it should be in writing (**with your correct mailing address, e-mail address and valid contact number**) and be received at this office on or before October 8, 2021.

RECEIVED
JUL 22 2021
CONTRACT NUMBER
19000000000000000000

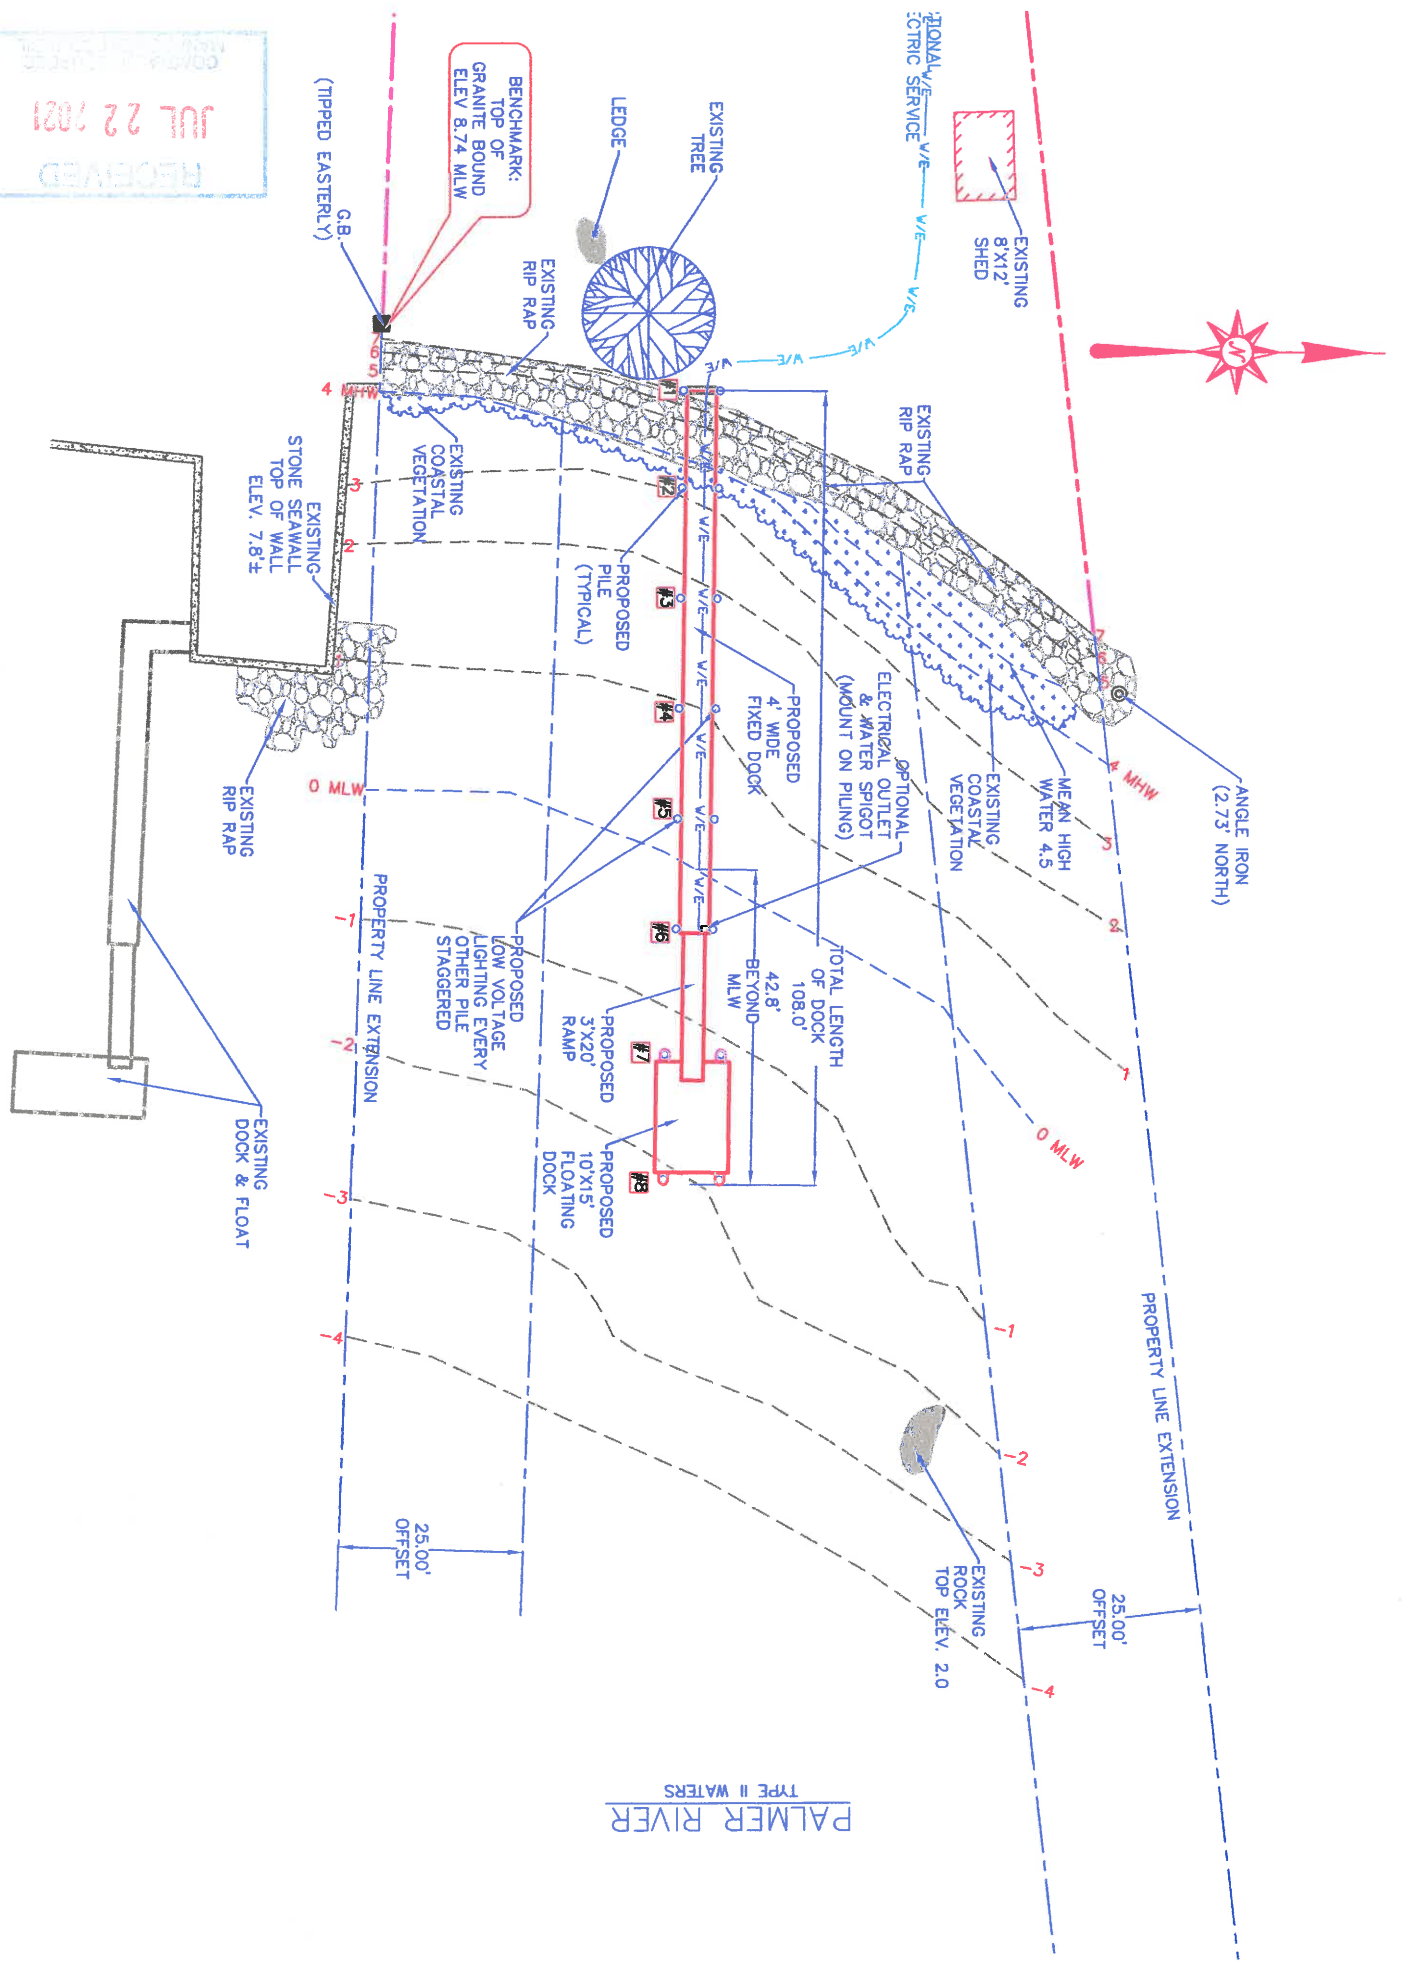

PALMER RIVER
TYPE II WATERS

RECEIVED
 JUL 22 2021

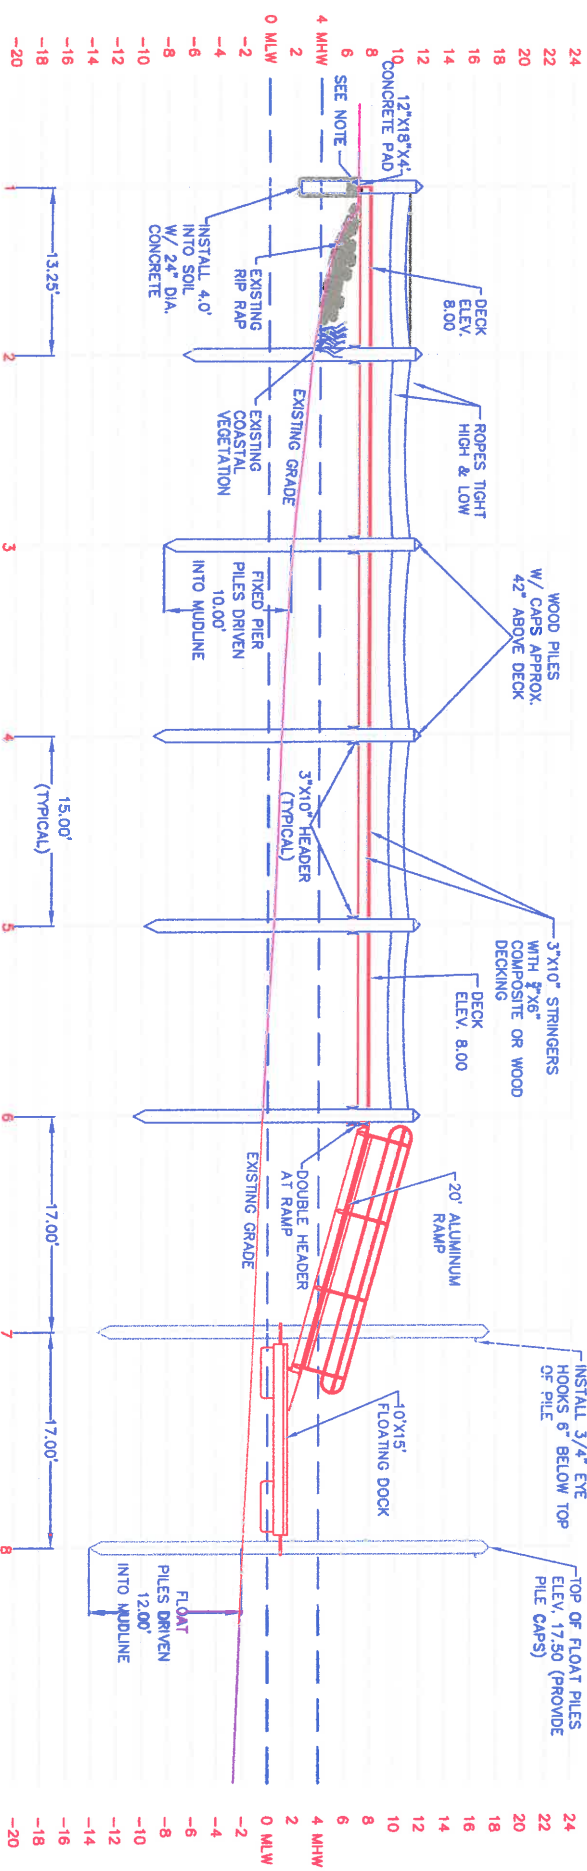

NOTE:
 INSTALL 4" x 4" x 1/4" STEEL ANGLES (GALVANIZED) TO FASTEN JOIST AT NEW CONCRETE PAD. FASTEN INTO CONCRETE W/ 2-1/2" x 4" EXPANSION BOLTS & INTO EACH JOIST W/ 2-1/4" x 3" LAG BOLTS

NOTE:
 ALL FIXED PIER PILES SHALL BE DRIVEN 10' BELOW MUDLINE. ALL FLOAT PILES SHALL BE DRIVEN 12' BELOW MUDLINE.

NOTE:
 FLOOD ZONE IS AE (EL. 13) MSL. HEIGHT OF FLOAT PILES=13+2(MLW TO MSL)+1.5'(FREEBOARD)+1=17.50

