



State of Rhode Island
Coastal Resources Management Council
Oliver H. Stedman Government Center
4808 Tower Hill Road, Suite 3
Wakefield, RI 02879-1900

(401) 783-3370
Fax (401) 783-2069

PUBLIC NOTICE

File Number: 2026-05-021 Date: July 21, 2026

This office has under consideration the application of:

**Ann Magliozzi
12 Leslie Avenue
Barrington, RI 02806**

for a State of Rhode Island Assent to construct and maintain:

new 40 ft long riprap revetment to replace deteriorated concrete and timber seawall.

Project Location:	12 Leslie Avenue
City/Town:	Barrington
Plat/Lot:	Plat 1 lot 77
Waterway:	Bullock Cove

Plans of the proposed work can be requested at Cstaff1@crmc.ri.gov.

In accordance with the Administrative Procedures Act (Chapter 42-35 of the Rhode Island General Laws) you may request a hearing on this matter.

You are advised that if you have good reason to enter protests against the proposed work it is your privilege to do so. It is expected that objectors will review the application and plans thoroughly, visit site of proposed work if necessary, to familiarize themselves with the conditions and cite what law or laws, if any, would in their opinion be violated by the work proposed.


If you desire to protest, you must attend the scheduled hearing and give sworn testimony. A notice of the time and place of such hearing will be furnished you as soon as possible after receipt of your request for hearing. If you desire to request a hearing, to receive consideration, it should be in writing (**with your correct mailing address, e-mail address and valid contact number**) and be received at this office on or before **August 21, 2026**.

Please email your comments/hearing requests to: cstaff1@crmc.ri.gov; or mail via USPS to: Coastal Resources Management Council; O. S. Government Center, 4808 Tower Hill Road, Rm 116; Wakefield, RI 02879.

/lat



NOAA CHART 13224

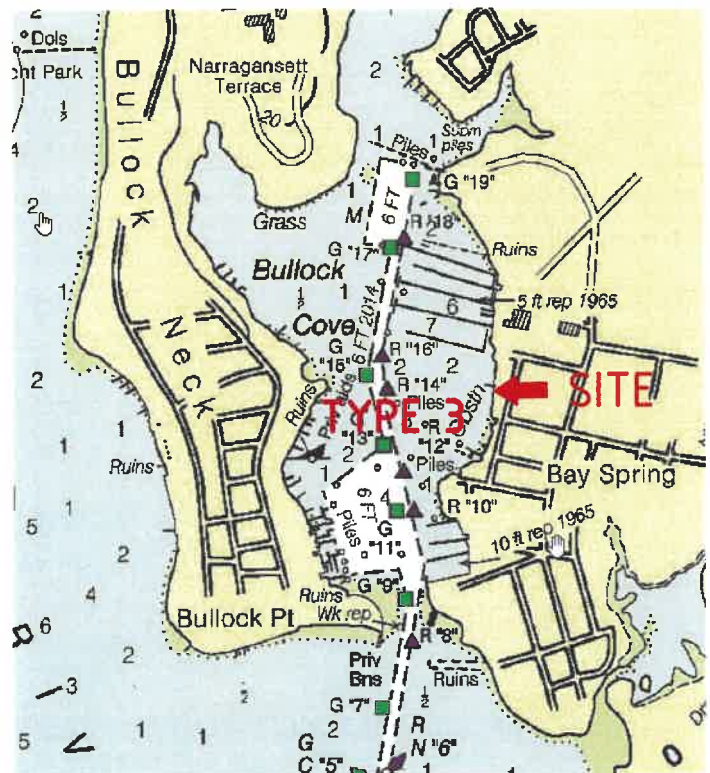

NOAA CHART 13224

APPLICATION FOR STATE ASSENT TO
RENOVATE/RECONSTRUCT EXISTING
REMNANT STRUCTURAL SHORELINE
PROTECTION WITH NEW RIPRAP
SHORELINE PROTECTION IN
SAME LOCATION. 40 LF +/- TOTAL.

APPLICATION BY:
ANN L. MAGLIOZZI
12 LESLIE AVENUE
BARRINGTON RI 02806



BULLOCK COVE, LKG SE (www.nae.usace.army.mil)



MAGLIOZZI SEAWALL RESTORATION

12 LESLIE AVENUE
BARRINGTON RI 02806

RECEIVED
JUN 10 2026
COASTAL ENGINEERING LLC
SEAWALL RESTORATION

by KWA

scale NTS

4/16/26
date: 5/25/26

sheet 1 OF 5



LOOKING NE (JUNE 2024)



LOOKING N (MARCH 2026)



LOOKING N/E (MARCH 2026)



LOOKING N/E (MARCH 2026)



LOOKING N (MARCH 2026)



LOOKING N/E (MARCH 2026)



EXISTING REMNANT CONCRETE/TIMBER WALL (AND UNAUTHORIZED BRICKS)

KWA
drawn by

MAGLIOZZI SEAWALL RESTORATION

date: 4/16/26
5/25/26 rev

2 OF 5
sheet

NTS
scale



LOOKING NE



LOOKING SE





LOOKING E



LOOKING E



LOOKING E (APPROX 3,000LF STRUCTURAL PROTECTION)



KW A
drawn by

MAGLIOZZI SEAWALL RESTORATION

date: 4/16/26
5/25/26

3 OF 5
sheet


VARIES
scale



TOWN OF BARRINGTON GIS



TOWN OF BARRINGTON GIS

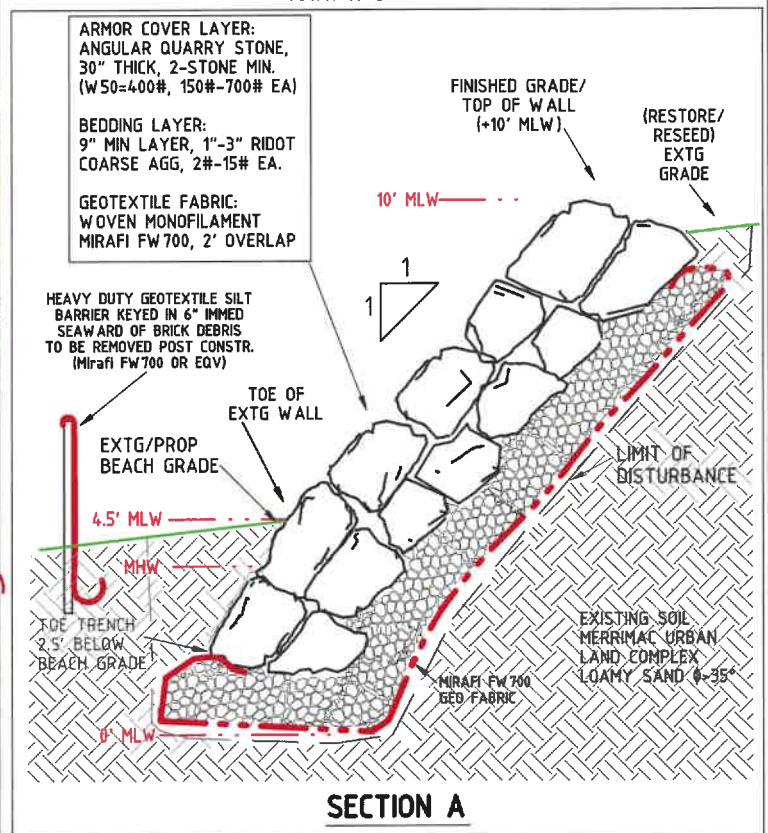

ANDERSON COASTAL
ENGINEERING LLC
(401) 742-2232

TOWN OF BARRINGTON GIS
0 20 40
SCALE (feet)

0 3.33' 6.66'
SCALE (3" = 10')

KENNETH W. ANDERSON



REGISTERED
PROFESSIONAL ENGINEER

MAGLIOZZI SEAWALL RESTORATION

12 LESLIE AVENUE
BARRINGTON RI 02806

RECEIVED

JUN 10 2026

COASTAL RESOURCES
MANAGEMENT GROUP

by KWA

scale NOTED

date: 4/16/26
5/25/26

sheet


4 OF 5

CONSTRUCTION SEQUENCE:

- 1) - PREPARE SHORELINE/LAND ACCESS ROUTE;
- 2) - REMOVE TREE AND FENCE NEAR IECF;
- 3) - INSTALL SHORELINE EROSION/SEDIMENTATION CONTROLS;
- 4) - PRE-CONSTRUCTION MEETING WITH ENGINEER (STAKE TOE);
- 5) - REMOVE BRICK DEBRIS (HAND TOOLS OR EQV PER E.O.R);
- 6) - EXCAVATE/REMOVE EXISTING REMNANT WALL;
- 7) - SECURE STOCKPILED FILL TO BE RE-USED;
- 8) - INSTALL GEOTEXTILE FABRIC;
- 9) - INSTALL BEDDING STONE;
- 10) - SET RIPRAP, BACKFILL W/BEDDING STONE, 1' LIFTS;
- 11) - STABILIZE SITE (RESEED)/MAINTAIN E&S UNTIL NON-EROSIVE.

MATERIAL NOTES:

- 1) -ARMOR / BEDDING STONE UNIT WEIGHT 165 PCF
- 2) -ANGULAR, ROUGH QUARRY STONE ONLY
- 3) -COVER LAYER THICKNESS: 24" - 30" (TWO STONES THICK)-
- 4) -W50= 400# , ARMOR STONE COVER LAYER
WEIGHT RANGE: 150# - 700# (14" - 27" STONE
ALONG INTERMEDIATE AXIS)
- 5) -BEDDING STONE LAYER: 9" MIN. 1"- 3" CLEAN ANGULAR STONE
- 6) -GEOTEXTILE MEMBRANE (BASE) LAYER: WOVEN MONOFILAMENT
PINNED TIGHTLY TO GRADED NATIVE SLOPE (MIRAFI FW700 OR
APPROVED EQUIVALENT.) EXTEND FROM TOP TO "WRAP" BASE TRENCH
(2.5' LAYER OVERLAP MINIMUM, ALL SEAMS)
- 7) -RE-GRADE/RE-SEED DISTURBED SOILS TO PRE-EXISTING GRADE +/-6"
- 8) -COVER RE-SEEDS AREAS WITH EROSION CONTROL/BURLAP BLANKET



ANDERSON COASTAL
ENGINEERING LLC
(401) 742 - 2232

KENNETH W. ANDERSON



REGISTERED
PROFESSIONAL ENGINEER
5/25/26

MAGLIOZZI SEAWALL RESTORATION

12 LESLIE AVENUE
BARRINGTON RI 02806

RECEIVED

JUN 10 2026

CULPINER DOUGLASS
MANAGEMENT COUNCIL

by KWA

scale N/A

date: 4/16/26
5/25/26

sheet 5 OF 5